


# 1.5 Watt 793 nm SheauPac Fiber Coupled Laser Module



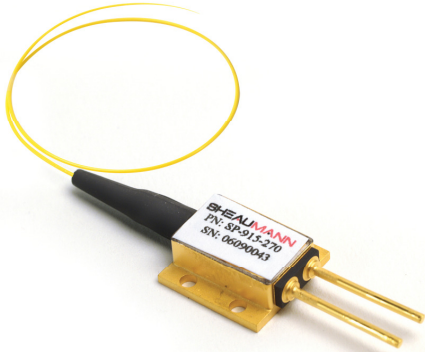


- 1.5 watts fiber output from single emitter
- 0.15NA, or .22NA 105/125 $\mu$ m fiber
- Various fiber jacket and connector options
- Electrically isolated case
- Hermetically sealed
- Power supply, test software, and copper air-cooled heat sink available separately

**SP-793-5-1015-1.5 - 0.15NA**  
**SP-793-5-1022-1.5 - 0.22NA**

### Specifications (at 25°C):

Center wavelength	793 $\pm$ 5nm
Spectral width	< 5nm FWHM
Threshold current	< 500mA
Operating current	< 3A
Operating voltage	< 2.0V
Operating temperature	15 - 55°C

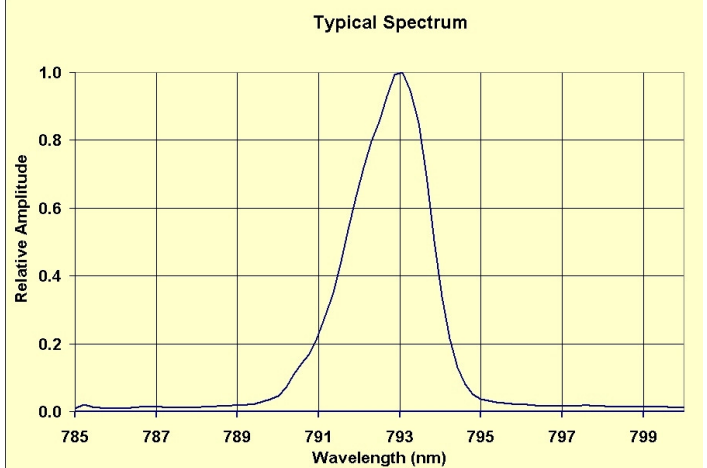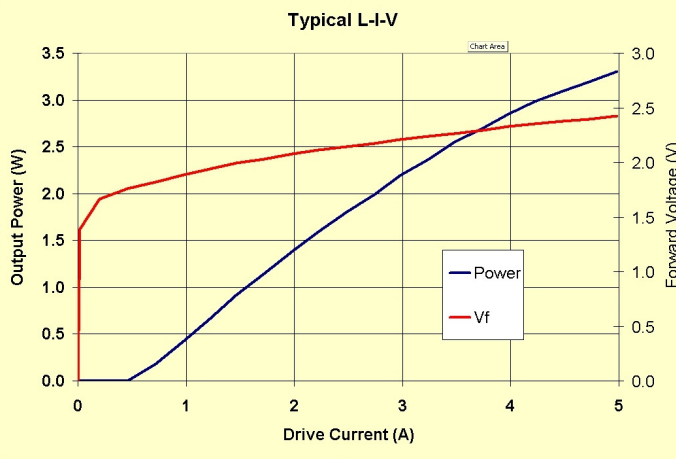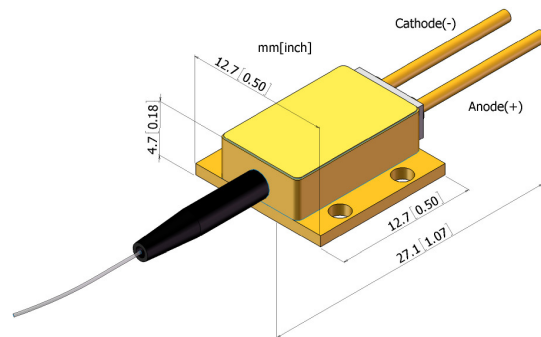

This Product is sold solely as a component for incorporation into other equipment. The purchaser assumes responsibility to comply with US 21 CFR 1040 SUBCHAPTER J with regard to the use of this laser and its introduction into commerce.

**SHEAUMANN**

**Sheaumann Laser, Inc.**  
 45 Bartlett St, Marlborough, MA 01752 USA  
[www.sheaumann.com](http://www.sheaumann.com)  
 Tel 508-970-0600 Fax 508-970-0610