




# B Series Butterfly 785nm 500mW

Locked, Multi-mode, Continuous  
Wave (CW)

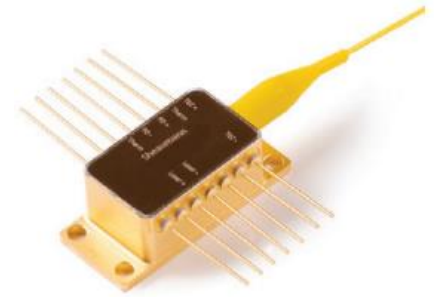

B2-785-0500-1LA

## Features & Options

- Wavelength locked by VBG to 785nm +/- 0.5nm
- Internal TEC, thermistor and photodiode
- Electrically isolated
- Hermetically sealed package
- Non-jacketed, single-mode fiber,
- FC/PC connector

### Optical Electrical Characteristics\*\*

Parameter	Unit
Wavelength	nm
Operating Power	W
Operating Current*	A
Operating Voltage	V
Threshold Current	A
Slope Efficiency	W/A
TEC	
TEC Current	A
TEC Voltage	V
Thermistor	
Thermistor Resistance	kΩ
Thermistor B Constant	k

### 500mW

Typ	Max
785	785.5
0.5	-
0.9	1.9
1.9	2.2
0.4	0.6
1.0	-
	2.2
	8.7
10	
3450	

### Absolute Maximum Ratings

Parameter	Unit	Condition	Min	Typ	Max
Case Temperature***	°C	CW	-20	25	50
Storage Temperature	°C	CW	-40	25	85

\* Please note that CW lasers may be damaged by excessive drive current or switching transients.

\*\* Data is based on CW operation at 25°C.

\*\*\* Device degradation accelerates with increased temperature.

This datasheet is for general reference only. Specifications are subject to change without notice. Product subject to availability. Visit [sheumann.com](http://sheumann.com) or contact [sales@sheumann.com](mailto:sales@sheumann.com) for more information on products and services.

#### Safety Warning

Laser light emitted from any laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the laser aperture when the device is in operation.

The use of optical instruments with this product will increase eye hazard.

#### ESD Warning

The primary cause of diode failure is unexpected electrostatic discharge. To help prevent device failures, the user should always wear an ESD wrist strap, ground all applicable work surfaces and follow anti-static techniques when handling diode lasers.

#### Operation Consideration

Operating the laser beyond the limits of the provided specifications may result in device failure or a safety hazard and will void warranty. Devices must be passively or actively cooled in accordance with the provided specifications. Failure to comply with heatsinking requirements may result in device failure.

#### Warranty

Due to the delicate nature of laser diodes, Sheumann offers a limited warranty for all products. Please refer to our Terms and Conditions for full details.

#### Compliance Notice

These products are intended solely as a component of an electronic product and are not certified in accordance with IEC 60825-1 or 21 CFR 1040.10/21 CFR 1040.11. These products are subject to Export Administration Regulations (EAR) and will require a Destination Control Statement or End User Agreement for each sales order.



[sales@sheumann.com](mailto:sales@sheumann.com)

+1 508.970.0600

[sheumann.com](http://sheumann.com)

# SHEAUMANN